




Drum Top HEPA Vacs



* Wand, hose and tools sold separately
Drum not included

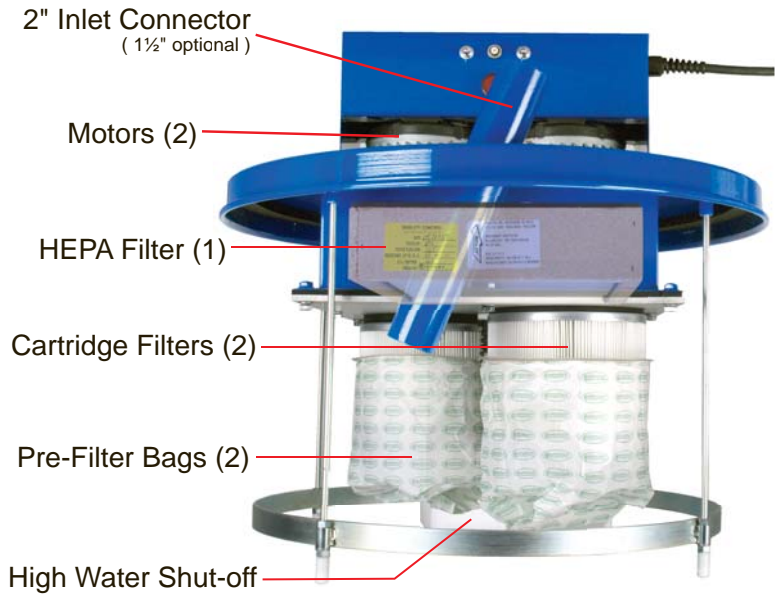

All Bullseye HEPA Vacs are tested for bypass leakage in accordance with the Brookhaven National Laboratory Standard IH62350 "HEPA Filter Vacuum Cleaner Testing." Copy available on request.

- Simultaneous Dry & Wet pickup
- Use with 55 gallon (208 L) steel drum
- 3 stage filtration
- Large settling chamber for long filter life
- Automatic high liquid shutoff
- Coiled 20' (6 m) grounding cable
- Pneumatic model available



3-Stage Filtration



Prefilter Bag
12 filters / Pack
VF-HE03



Pleated cartridge (MERV 12)
Spunbond Polyester Media
VF-301



HEPA Filter
99.97+%
VF-HE03

Model VA-DE2H	
Dimensions	25" dia x 22.5" h (635 x 570 mm)
Filtration	3-Stage
Air Flow (peak)	210 cfm Peak Flow
Suction (peak)	5.8" Hg (20 kPa)
Electrical	120 VAC / 17 amp 230 VAC / 8.2 amp optional
Motors	2
Noise, dBA at 10'	83 dB
Capacity	35 gallons (132 L)
Inlet Size	2" (1.5" optional)
Portability	See drum dolly option
Ship Weight	58 lbs (26 kg)
Waste Handling	Seal, label and ship drum for recycling or disposal

NOTE: Suitability of this vacuum for use in a particular application is the sole responsibility of the user.



3747 N. Booth Street Milwaukee, WI 53212 USA
Phone: (414) 962-5323 Fax: (414) 962-7003



Vacuum Accessories

2" TOOL KIT #VA2-1

- 54" 2-Piece Wand
- 2" x 25' Type-I Polyethylene Hose
- 14" Tampico Floor Brush
- 14" Neoprene Squeegee
- 24" Steel Crevice Tool
- 2" Swivel Cuffs (2)



Drum Dolly

#VA-DC2

ESCA Tech offers a full line of vacuum tools, hose and accessories.
For more information, please call (414) 962-5323 or email cservice@esca-tech.com.



Floor Brushes



Squeegees



Combination Tools



Wands & Extensions



Pipe Cleaning Tools



Utility Tools



Crevice Tools

1 1/2" and 2" Vacuum Hose

Type	Description	Temp °F	Flexibility
I	Medium duty, crushproof hose provides good chemical, abrasion, kink and UV resistance.	-40 to +140	Flexible
N	Medium industrial duty PVC hose with a spring steel helix and reinforced with synthetic yarn.	-20 to +150	Very Flexible
S	Static dissipative polyurethane hose reinforced with an external ABS helix and internal embedded copper grounding wire. Surface resistivity of 10 ⁹ to 10 ¹⁰ ohms per square.	-40 to +200	Flexible
RSC	Static conductive polyethylene crushproof hose with carbon black for permanent static conductivity. Surface resistivity of 10 ³ to 10 ⁵ ohms per square.	-30 to +150	Very Flexible

Hoses can be supplied with or without cuffs in single lengths up to 50 feet.
Swivel cuffs are standard except on type S hose.
Additional hose types and diameters are available.



Personnel Vacuum Station
Custom solutions available



3747 N. Booth Street Milwaukee, WI 53212 USA
Phone: (414) 962-5323 Fax: (414) 962-7003